



Model DV-600c

Size 30" X 24"

Standard Features

- Hot Dip Galvanized Skids
 - Radiator Enclosure
 - Battery Box
- Emissions Certified Engines
 - Caterpillar and John Deere
- Locking Battery Boxes

Pump Features

- Solids handling capacities to 5.25" diameter
- Continuous self-priming
- Runs dry unattended
- Suction lift to 28 ft.
- Skid mounted
- Auto-start capable control panel
- Fast priming with no "Blow-By"




Technical

- Pedestal mounted pump end
- John Deere 6135H diesel-fueled engine, 12 volt, electric start
- Skid-mounted pump and engine with lifting frame
- 400-gallon capacity fuel tank
- 60 CFM vacuum pump priming
- Push / Pull oilfield tail-boarding bars

Material Specifications

- Standard Build
 - Cast Iron enclosed Impeller
 - Replaceable wear rings
- Pump Shaft
 - 17-4PH Stainless Steel
- Mechanical Seal
 - Tungsten carbide v. silicon carbide mating faces
 - Oil-bath lubrication for dry running
- Flanges
 - 30" suction; 24" discharge
 - ANSI 150# FF

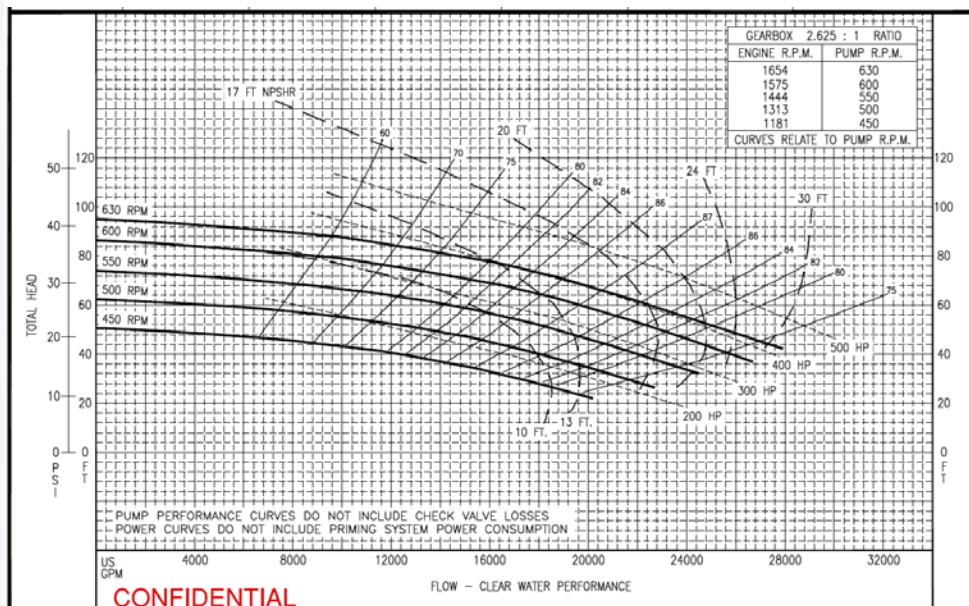

Rain for Rent


P.O. Box 2248
 Bakersfield CA 93303
 800-742-7246
 661-393-1542
 FAX 661-393-1542
 www.rainforrent.com
 info@rainforrent.com

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice



DV-600C Technical Specifications

Production Curve

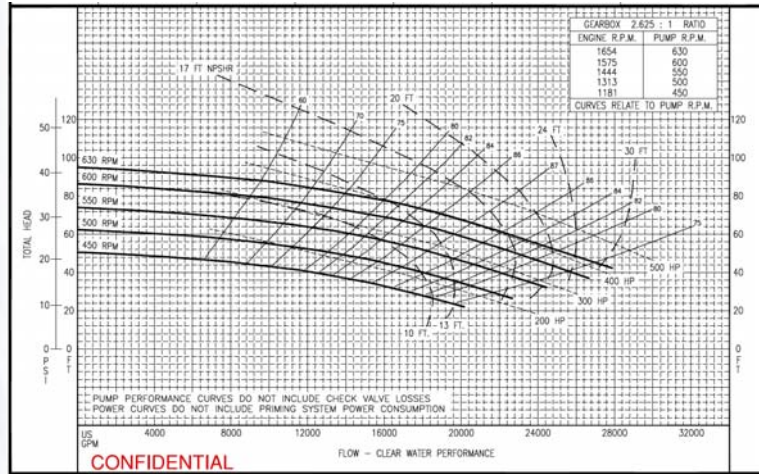

Performance Specs

Minimum Operating Speed:	450 RPM
Maximum Operating Speed:	630 RPM
Maximum Head:	96 ft.
Maximum Flow:	28,000 GPM





Design Details

Pump Designation:	DV-600C
Pump Description:	Centrifugal end suction pump, single stage, volute type, 3 vane non-clog impeller
Solid Handling Size:	Up to 5.25 inches
Operating Temperature	MIN: +35°F MAX: +160°F

Dimensions

DV-600c – John Deere 6135H Tier 3
 Dry weight – 27,000 lbs
 Approximate dimensions – 240" L x 102" W x 103 +/- 6" H

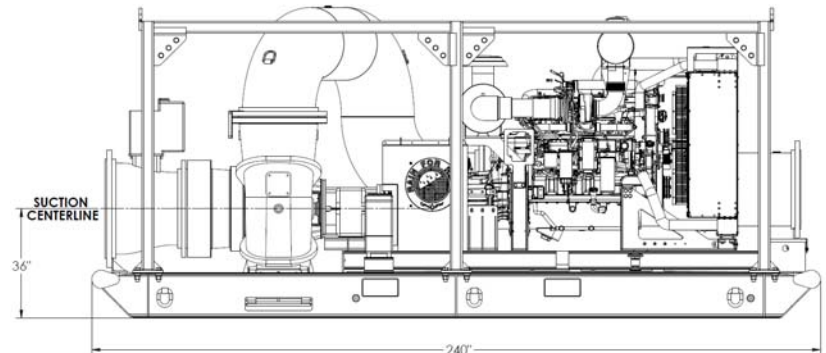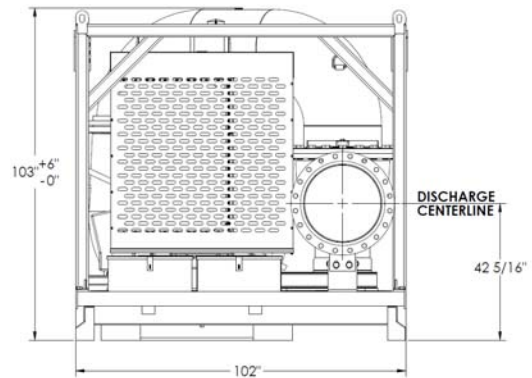

Rain for Rent
 P.O. Box 2248
 Bakersfield CA 93303
 800-742-7246
 661-399-9124
 FAX 661-393-1542
 www.rainforrent.com
 info@rainforrent.com

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.