



Model DV-100 Electric

Size 4" X 4"

Standard Features

- Hot Dip Galvanized Open Skids
- Fork Lift tubes
- Four corner bolt down angles
- Skid mounted with optional lifting bale
- Locking control panel
- Nu-T-Link compressor drive belt to allow easy belt replacement

Pump Features

- Solids handling capabilities to 2 1/4" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28 ft.
- Skid or trailer mounted
- Stainless Steel and CD4MCu pump Options




Technical

- Coupled to a 20hp 60 cycle TEFC hostile duty dual voltage (230/460V) motor
- Fitted 480 volt control panels are equipped with motor protection
- The UL Type 3L Control panel is designed for outdoor duty
- Panels are equipped with Terminal Blocks for 2 remote float switches (Low off, High on)

Material Specifications

- Standard Build - 316 Stainless Steel open impellers and replaceable wear plates
- Pump Shaft is 431 Stainless Steel. All other major components are spheroidal graphite iron.
- Mechanical Seal, with solid silicon carbide mating faces
- Oil-bath lubrication for dry running
- Suction / discharge flanges 4" ANSI 150# FF.

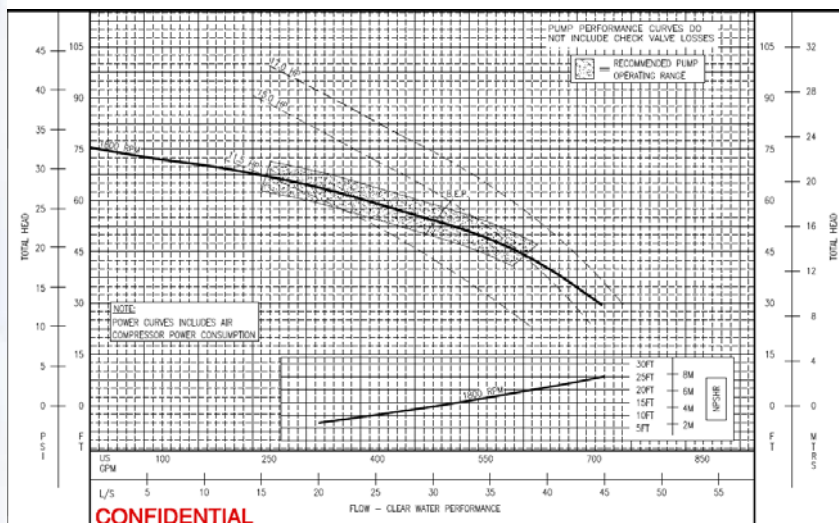

Rain for Rent
 P.O. Box 2248
 Bakersfield CA 93303
 800-742-7246
 661-393-1542
 FAX 661-393-1542
www.rainforrent.com
info@rainforrent.com

Rain for Rent is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.